

KT-16999 Injection Pump

The injection-pump KT-16999 allows easy and fast injection of synthetic resin at a build-up pressure above 400 bar into concrete cracks with the aid of our injection packers.



The injection-pump KT-16999 has a coupling flanged to a reduction gear which can be attached to any standard electric drill with a detachable chuck and a 17mm key face.

An even working pressure and a consistent delivery is ensured by the regular speed of the drill.

The delivery volume of the injection pump is around 30 litres per hour.

The tank has a capacity of 1 litre.

Weight excluding drill is 7.5 kg.



High Pressure Hose
16999-H



High Pressure Gauge
16999-M



Control Valve
16999-G




Nipple Gripper
KT1042Va

Scope of delivery:

KEISERtools injection pump KT-16999, complete with standard pressure gauge, high-pressure hose, nipple gripper, 1 set of spanners, all packed in one box with a list of spare parts, assembly drawing, and operating instructions.

KEISERtools®

Injection Tools

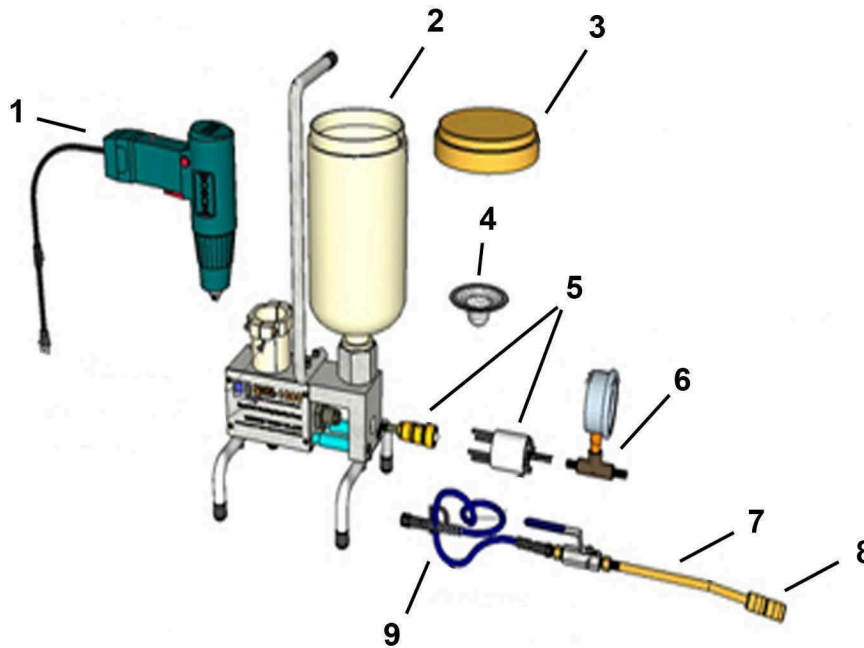


1- Electric Drill
2- Hopper
3- Hopper Cover

4- Filter
5- Piston Pump
6- Pressure Gauge

7- Control Valve
8- Nipple Gripper
8- High Pressure Hose

Injection Packers

Part Number	Diameter (mm)	Length (mm)
IP-13/80	13	80
IP-13/115	13	115
IP-13/150	13	150
IP-13PK250	13	250

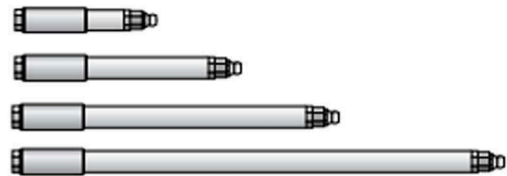

**Due to continuous research and product improvement all specifications are subject to change without prior notice*

1042 Va Nipple Grippers



Nipple gripper with 4 close gripping clamps, fits any cone-head nipple, with solvent resistant lining on the inside. Thread M 10 x 1.0, Female

Other KEISERtools® products:



Aluminium Screeds
Up to 4 m long



Spiked Rollers



Spiked Shoes

Your Local Distributor



اوتال
OTAL

OTAL (LLC) - DUBAI
T: (+971 4) 267 96 46
F: (+971 4) 267 96 56
E: info@otal.ae
www.otal.ae